


NOTES:

- 1 Refer to Secondary Sheet for Tabulated Data.
- 2 ϕ A1 and ϕ A2 shafts may near butt except:
 When any Bore $> \phi$ 16.00 the component shaft MAX penetration is 15.36 or when both Bores $> \phi$ 16.00 the component shaft MAX penetration is 15.36 & the MIN shaft end to shaft end is 19.28.
- 3 Hubs and HELI-CAL FLEXURE are made from a single piece of material.
- 4 Set Screw attachment, hex socket, ISO std., cup point set screw furnished: both hubs.
- 5 Backlash: None. No lubrication required.
- 6 Permitted axial motion from free length: ± 0.25
- 7 RPM: Up to 10,000, depending upon application.
- 8 Working torque ratings are based upon continuous duty with noted misalignments applied separately and may be increased with improved alignment: Refer to Tabulated Data
- 9 Permissible shaft misalignment: Angular, up to 5° Offset, up to 0.25 (FIM, 0.50)
- 10 Weight based on WA40-12mm-12mm

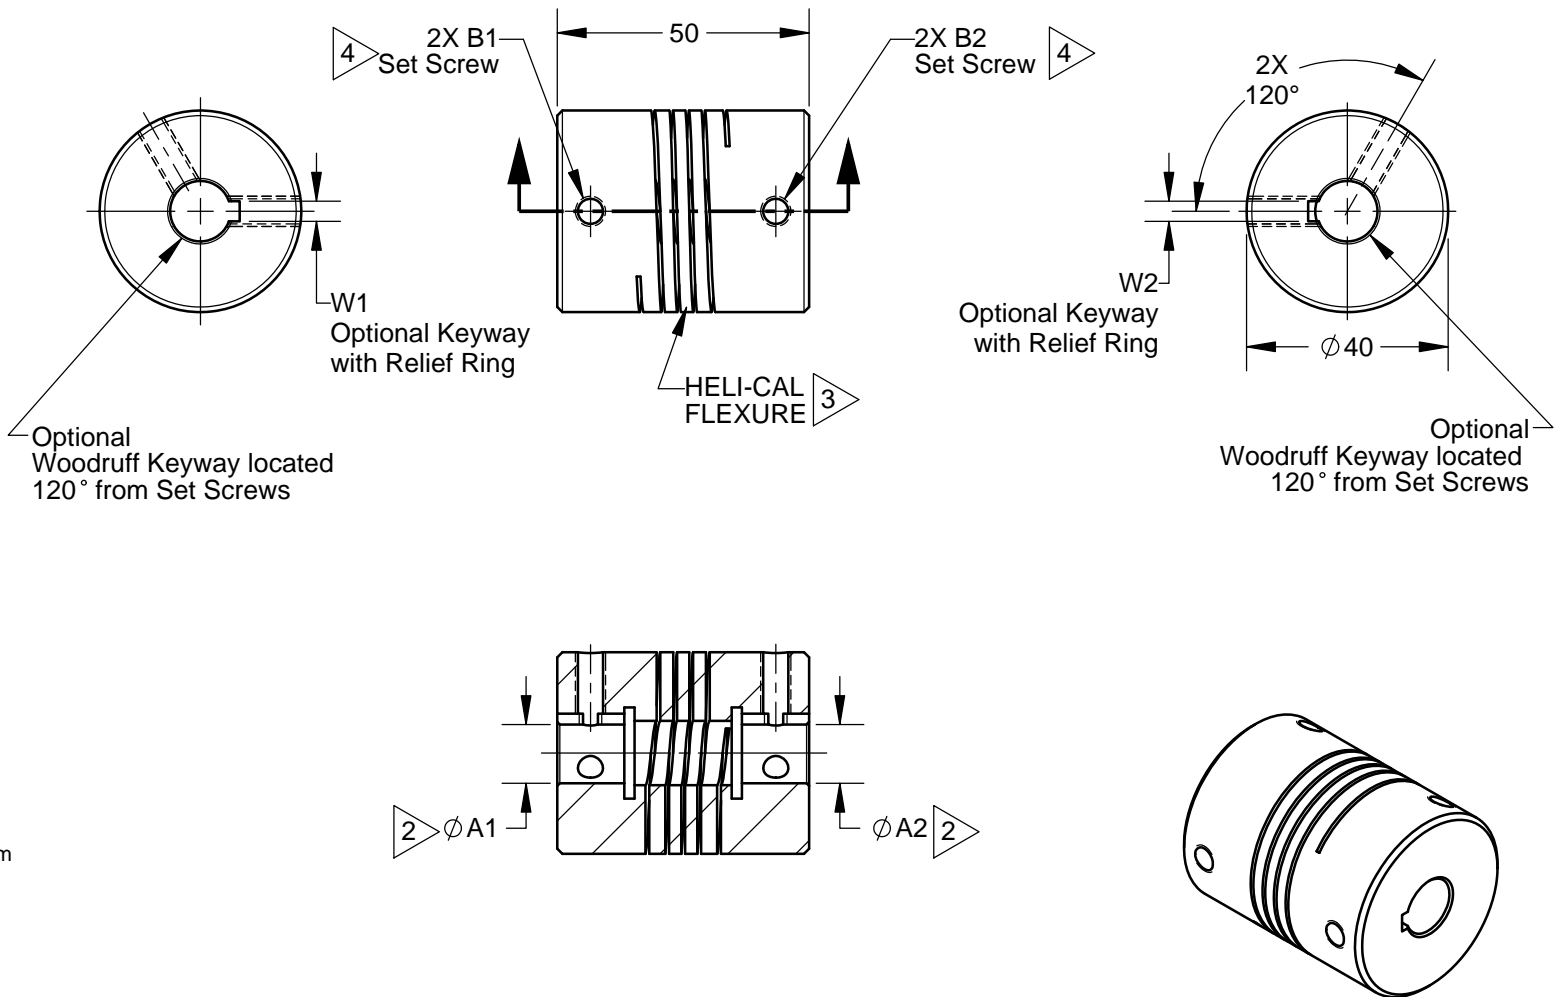

NOTICE: THE INFORMATION AND DATA CONTAINED HEREIN IS CONSIDERED PROPRIETARY TO HELICAL PRODUCTS COMPANY, INC., AND SHALL REMAIN THE EXCLUSIVE PROPERTY OF HELICAL. THE HOLDER WILL ASSUME CUSTODY AND CONTROL THAT THIS DOCUMENT WILL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE EXPRESS WRITTEN CONSENT OF HELICAL. POSSESSION OF THIS DOCUMENT DOES NOT CONSTITUTE A GRANT TO MANUFACTURE ANY ITEM. Copyright HELICAL PRODUCTS CO.

11-25-14	---	ECR#14102000 Added calc. weight	DCE	EK
08-14-13	---	Redrawn in Solidworks	CL	JAJ/EK
01-25-10	---	Finish was Chromic Acid Anodize; Updated GD&T	JAJ	HG
DATE	LTR	REVISION	APVR	

Unless otherwise specified all tolerances and dimensions are in millimeters.

Inch	Metric
X/XX \pm 1/64	X \pm 0.5mm
.XX \pm .01	X.X \pm 0.25mm
.XXX \pm .005	X.XX \pm 0.15mm

Angles $\pm 2^\circ$

Break sharp corners 0.25 MAX
 All surface finish 63 roughness
 Do Not Scale Drawing

		901 West McCoy Lane P.O. BOX 1069 SANTA MARIA, CA. 93456 U.S.A. PHONE (805) 928-3851 FSC13201	
DRAWN BY	DATE	TITLE	
BJM	09-02-99	HELICAL FLEXIBLE SHAFT COUPLING	
CHECKED BY	DATE	MATL	
MC	09-20-99	7075-T6 Aluminum Alloy	
APPRVD BY	DATE	FINISH	
DH	09-28-99	Anodize IAW HPS1000	
WEIGHT (calculated)		DRAWING NUMBER	
145 g		WA40	
SHEET 1 of 2		REV	

TABULATED DATA

Copyright HELICAL PRODUCTS CO

MATERIAL: 7075-T6 Aluminum Alloy

FINISH: Anodize IAW HPS1000

Drawing Number

WA40

REV

DO NOT SCALE DRAWING

SHT 2 of 2

ITEM DESCRIPTION (Part Number)	BORE SIZES		TORQUES (Nm)			SET SCREW THREAD		KEYWAY DIMS Width	
	TOLERANCE +0.002in or +0.05mm -0.000in or 0		Momentary Dynamic	Non- Reversing	Shock or Reversing	B1	B2	TOLERANCE +0.002in or +0.05mm -0.000in or 0	
	Ø A1	Ø A2						W1	W2
WA40-12mm-6mm	12.00mm	6.00mm	12.0	6.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-12mmQ4-10	12.00mm	.313in	12.0	6.0	3.0	M6 X 1.0	M6 X 1.0	4.00mm	n/a
WA40-12mm-12mm	12.00mm	12.00mm	12.0	6.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-12mmQ4-12mmQ4	12.00mm	12.00mm	12.0	6.0	3.0	M6 X 1.0	M6 X 1.0	4.00mm	4.00mm
WA40-16-12	.500in	.375in	12.0	6.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-16-16	.500in	.500in	12.0	6.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-13mm-10mm	13.00mm	10.00mm	12.0	6.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-14mm-10mm	14.00mm	10.00mm	11.0	5.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-14mm-12mm	14.00mm	12.00mm	11.0	5.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-14mm-14mm	14.00mm	14.00mm	11.0	5.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-15mm-10mm	15.00mm	10.00mm	10.0	5.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-15mm-11mm	15.00mm	11.00mm	10.0	5.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-15mm-12mm	15.00mm	12.00mm	10.0	5.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-15mm-15mm	15.00mm	15.00mm	10.0	5.0	3.0	M6 X 1.0	M6 X 1.0	---	---
WA40-20-12mm	.625in	12.00mm	9.7	2.4	4.9	M6 X 1.0	M6 X 1.0	---	---
WA40-20-20	.625in	.625in	9.7	2.4	4.9	M6 X 1.0	M6 X 1.0	---	---
WA40-16mm-10mm	16.00mm	10.00mm	9.7	2.4	4.9	M6 X 1.0	M6 X 1.0	---	---
WA40-16mm-12mm	16.00mm	12.00mm	9.7	2.4	4.9	M6 X 1.0	M6 X 1.0	---	---
WA40-16mm-16mm	16.00mm	16.00mm	9.7	2.4	4.9	M6 X 1.0	M6 X 1.0	---	---
WA40-18mm-18mm	18.00mm	18.00mm	9.7	2.4	4.9	M6 X 1.0	M6 X 1.0	---	---
WA40-19mm-10mm	19.00mm	10.00mm	9.7	2.4	4.9	M6 X 1.0	M6 X 1.0	---	---
WA40-19mm-12mm	19.00mm	12.00mm	9.7	2.4	4.9	M6 X 1.0	M6 X 1.0	---	---
WA40-19mm-14mm	19.00mm	14.00mm	9.7	2.4	4.9	M6 X 1.0	M6 X 1.0	---	---
WA40-19mm-15mm	19.00mm	15.00mm	9.7	2.4	4.9	M6 X 1.0	M6 X 1.0	---	---
WA40-24mm-14mm	24.00mm	14.00mm	9.7	2.4	4.9	M6 X 1.0	M6 X 1.0	---	---